


## Starter Units

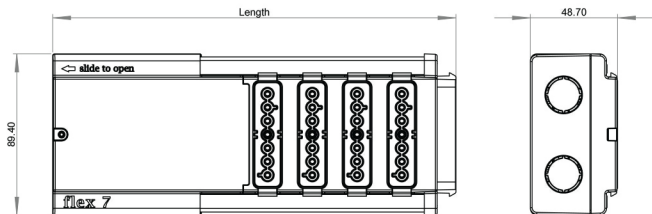

### Connection unit length

2 way outlet:	175mm
4 way outlet:	225mm
6 way outlet:	275mm
8 way outlet:	325mm
10 way outlet:	375mm
12 way outlet:	425mm

All measurements are in millimetres

### Rating

**Supply Voltage:** 230V~ 16A,

Tested to BS5733

**Conformity:** LVD-2006/95/EC

Manufactured in black PA6 UL94 V-0 rated, PC/ABS, UL94 V-0 rated and Anodised Aluminium.

7 contacts per outlet, each rated at 16 amps, using flex7 outlet format. Total system rating 16A.

3 x 2.50mm<sup>2</sup>, 2 x 4.00mm<sup>2</sup> or 1 x 6.00mm<sup>2</sup> conductors.